

SPECIFICATION SHEET



Gray Metal Products, Inc.
 Gray Metal Products, Inc.
 P.O.Box 129
 Avon, New York 14414
 PH:585-226-8660
 FX:585-226-9356
 www.graymetal.com



Job: _____
 Location: _____
 Engineer: _____
 Contractor: _____
 P.O.#: _____
 Job#: _____
 Representative: _____

Certified Correct

By: _____
 Title: _____
 Date: _____

Aluminum Flex Duct

GM Part#
801

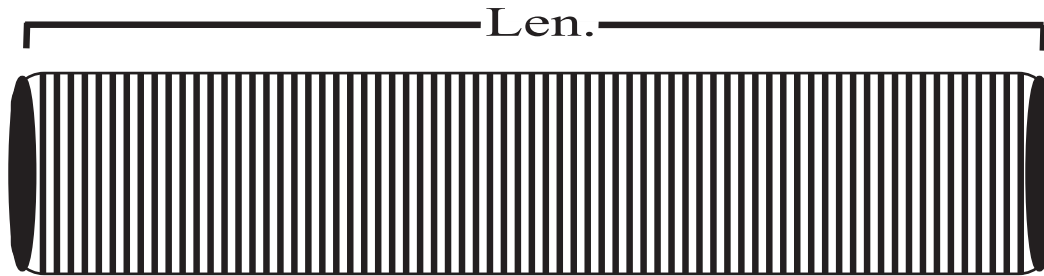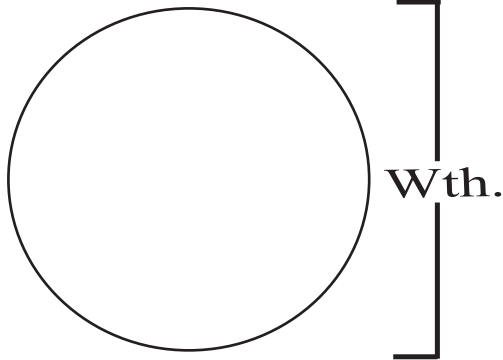

Meets SMACNA

ALUMINUM FLEX

CONSTRUCTION

ALLOY	3003	Core Fabric	Aluminum
Temper(hardness)	0	SEAM	Mechanical
Gauge(inches)	.0399	Radius or Inner Bend	1/2 of Inner Dia.
Tensile(PSI)	15,071	Temperature Range	-100°F to 435°F
Elongation(percent)	19.3	Inner Diameters	3"-20"
Cup(inches)	320	Standard Length	8', 10', 25'
Yield(PSI)	6,601		

Corrugated aluminum foil twisted to form a continuous airtight lock-seam